



ADJUSTABLE CONEJET® TIP No.	PERFORMANCE	LIQUID PRESSURE IN PSI (LBS. PER SQUARE INCH)											
		20 PSI		30 PSI		40 PSI		60 PSI		100 PSI		150 PSI	
		SETTING A	B	SETTING A	B	SETTING A	B	SETTING A	B	SETTING A	B	SETTING A	B
5500-X1	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.049 40° 24.2	.015 38° 1.0	.061 54° 27.6	.017 54° 1.5	.07 71° 31.1	.02 71° 1.5	.086 80° 29.9	.025 80° 1.5	.11 83° 25.3	.028 83° 1.5	.14 83° 18.14	
5500-X2	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.025 40° 1.5	.091 60° 29.2	.03 60° 1.5	.11 68° 32.1	.033 68° 2	.13 75° 33.6	.04 75° 2	.16 80° 32.8	.05 80° 2	.20 83° 28.5	.058 83° 2	.25 83° 21
5500-X3	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.037 57° 2	.13 68° 31.3	.045 68° 2	.17 72° 34.1	.05 72° 2	.19 76° 35.4	.058 76° 2	.23 80° 34.1	.073 80° 3	.30 82° 30.1	.088 82° 3	.37 82° 23.1
5500-X4	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.05 61° 2.5	.18 70° 32.8	.058 70° 2.5	.22 73° 35.9	.067 73° 3	.25 77° 36.5	.08 77° 3	.31 80° 35.1	.10 80° 3	.40 81° 31.2	.12 81° 3	.49 81° 24.9
5500-X5	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.061 61° 2.5	.21 70° 33.87	.076 70° 2.5	.26 74° 36.5	.082 74° 3	.30 77° 37.1	.10 77° 3	.37 80° 35.8	.13 80° 3	.48 81° 31.7	.15 81° 3	.58 81° 26.1
5500-X6	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.073 65° 2.5	.26 71° 34.7	.087 71° 3	.32 74° 37.3	.10 74° 3	.37 77° 38.3	.12 77° 3.5	.45 80° 36.5	.15 80° 3.5	.58 80° 32.7	.19 80° 3.5	.71 80° 27.7
5500-X8	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.097 66° 3	.33 71° 35.9	.12 71° 3	.40 74° 38.9	.13 74° 3	.47 77° 39.8	.16 77° 3	.57 80° 37.87	.21 80° 4	.74 80° 34.6	.25 80° 4	.90 80° 30
5500-X10	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.12 68° 3	.42 72° 36.7	.15 72° 3.5	.52 75° 39.7	.17 75° 3.5	.60 78° 40.5	.21 78° 4	.75 80° 38.9	.26 80° 4	.94 80° 35.7	.31 80° 4	1.2 80° 31.9
5500-X12	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.15 69° 3.5	.49 73° 37.6	.18 73° 4	.60 76° 40.8	.20 76° 4	.69 78° 41.6	.24 78° 4	.84 80° 40.2	.31 80° 4	1.1 80° 37.5	.38 80° 4	1.3 80° 33.5
5500-X14	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.17 70° 3.5	.55 74° 38	.20 74° 4	.67 76° 41.4	.23 76° 4	.78 78° 42.6	.29 78° 4	.95 80° 41.3	.37 80° 4.5	1.2 80° 39.2	.45 80° 4.5	1.5 80° 35.8
5500-X18	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.21 71° 4	.69 75° 38.1	.26 75° 4	.84 77° 42.1	.30 77° 4	.97 78° 43.5	.37 78° 4	1.2 80° 42.5	.47 80° 5	1.5 79° 40.3	.58 79° 5	1.9 79° 37.3
5500-X22	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.26 71° 4	.83 75° 38.3	.32 75° 4.5	1.0 78° 42.7	.37 78° 5	1.2 79° 44.6	.45 79° 5	1.4 80° 43.3	.58 80° 5	1.9 78° 40.7	.70 78° 5	2.3 78° 37
5500-X26	CAPACITY-GPM SPRAY ANGLE MAX. THROW-FT.	.31 72° 4.5	.98 76° 38.1	.37 76° 5	1.2 78° 43	.43 78° 5	1.4 79° 45	.53 79° 45	1.7 80° 43.7	.68 80° 5.5	2.2 78° 41.2	.83 78° 5.5	2.7 78° 36.8

ABOVE DATA IS BASED ON SPRAYING WATER FROM A HEIGHT OF ABOUT 2 1/2 FEET... WITH TIP TILTED ABOUT AS SHOWN AT RIGHT FOR EACH SETTING.

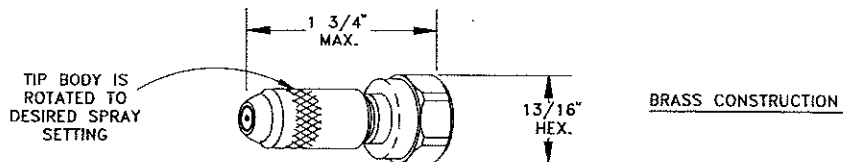


No. 5500-- ADJUSTABLE CONEJET TIP


ADJUSTABLE CONEJET® TIPS ARE SUPPLIED AS A TIP AND CAP ASSEMBLY TO FIT ANY STANDARD TYPE T OR TT SPRAY NOZZLE BODY OR TRIGGER VALVE SPRAY GUN, AS SHOWN BELOW.



No. 5500-- ADJUSTABLE CONEJET TIP WITH TYPE T NOZZLE BODY

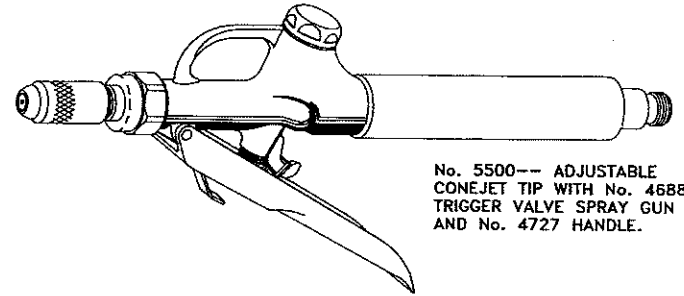

No. 5500-- ADJUSTABLE CONEJET TIP WITH No. 4688 TRIGGER VALVE SPRAY GUN AND No. 4727 HANDLE.

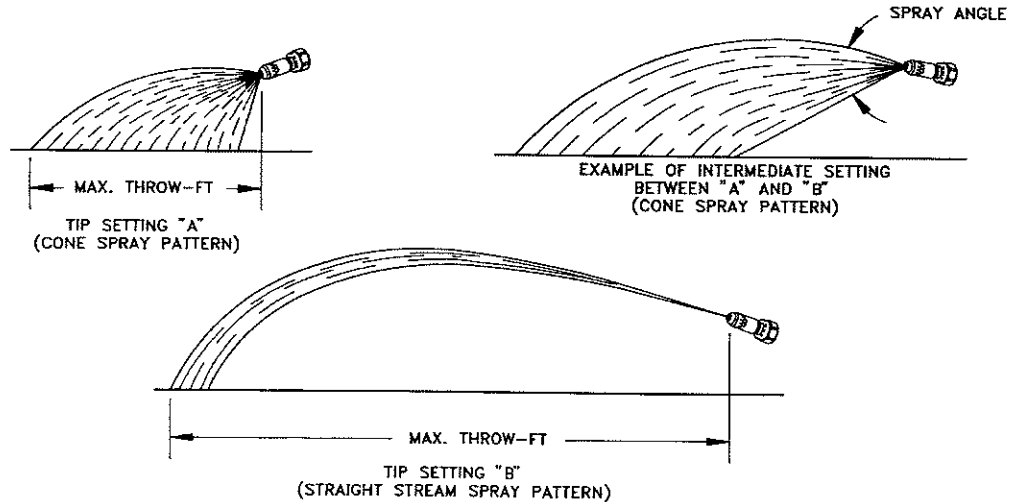

DESCRIPTION

No. 5500--
ADJUSTABLE CONEJET® TIP



Spraying Systems Co.

Spray Nozzles and Accessories

North Avenue at Schmale Rd. • P.O. Box 7900
Wheaton, IL 60189-7900

Ref:

Data Sheet No.

Revision No. 3

16039