

1125 SERIES



1125 Series hand crank and motorized hose reels have the features demanded by industry professionals. The industry preferred design features a sturdy one piece all welded "A" frame base, low profile outlet riser and open drum slot design provides a non-crimping, flat smooth hose wrap.

SWIVEL

- External fluid path with machined from solid brass 90° full-flow NPT swivel inlet (Nickel plated steel swivel on 1" models)
- Swivel Seals: NITRILE (AFLAS on 1" models)

DESIGN & STRUCTURE

- All welded steel "A" frame construction for superior reel structure
- Exclusive low profile outlet riser & open drum slot design for flat smooth hose wrap
- Permanently lubricated self-aligning pillow block bearings for trouble-free & smooth rotation
- Adjustable tension brake to prevent "free-wheeling" during operation
- Long-handled locking pin to secure reel from rotation during transport or storage

RETRACTION

Choice of:

- Solid steel direct hand crank with smooth round handle
- Reliable bevel gear hand crank with removable handle for compact storage (model with suffix -C)

SIGNATURE FEATURES

- Professional grade heavy duty steel construction
- Durable proprietary CPC™ powder coat finish
- CNC robotically spun and ribbed discs with rolled edges provide strength, safety, and durability
- Industry leading 2 year manufacturer's limited warranty
- Made in the U.S.A. – Sold & Supported Worldwide

POSSIBLE FIELDS OF APPLICATION

- Industrial Plant & Ground Maintenance
- Fire Suppression
- Farming
- Construction Sites
- Landscaping
- Pest & Weed Control
- Golf Course Maintenance
- Air Compressor
- Washdown
- High-Flow Watering
- Hydro Seeding
- Pressure Washing
- Agricultural Spraying
- Chemical Fluid Transfer

MODELS


ACCESSORIES

APPLICATION SHOTS

VIDEOS

TECHNICAL DOCUMENTS

- Product manual - [DOWNLOAD](#)
- Exploded drawings - [DOWNLOAD](#)

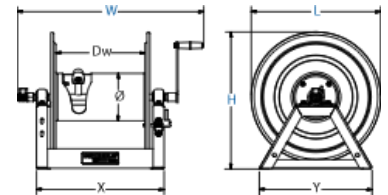

Click "Add to Quote" to view compatible accessories

REEL			CAPACITY			OPT. CAPACITY			PSI	SIZE INDEX			Overall Dimensions
MODEL	LBS	HOSE	I.D.	O.D.	FT.	I.D.	O.D.	FT.		W	H	L	
1125-4-100	36	N	1/2"	7/8"	100	3/8"	3/4"	140'	3000	19-1/2"	18-3/4"	17-5/8"	Add to Quote
1125-4-200	39	N	1/2"	7/8"	200	3/8"	3/4"	300'	3000	25-1/2"	18-3/4"	17-5/8"	Add to Quote
1125-4-325	48	N	1/2"	7/8"	325	3/8"	3/4"	450'	3000	31-1/2"	18-3/4"	17-5/8"	Add to Quote
1125-4-450	52	N	1/2"	7/8"	450	3/8"	3/4"	625'	3000	37-1/2"	18-3/4"	17-5/8"	Add to Quote
1125-4-500	58	N	1/2"	7/8"	500	3/8"	3/4"	700'	3000	41-1/2"	18-3/4"	17-5/8"	Add to Quote
1125-5-50	38	N	3/4"	1-1/4"	50	1/2"	7/8"	100'	3000	20-3/4"	18-3/4"	17-5/8"	Add to Quote
1125-5-100	42	N	3/4"	1-1/4"	100	1/2"	7/8"	200'	3000	26-3/4"	18-3/4"	17-5/8"	Add to Quote
1125-5-175	50	N	3/4"	1-1/4"	175	1/2"	7/8"	325'	3000	32-3/4"	18-3/4"	17-5/8"	Add to Quote

1125-5-200	55	N	3/4"	1-1/4"	200	1/2"	7/8"	450'	3000	38-3/4"	18-3/4"	17-5/8"	Add to Quote
1125-5-250	59	N	3/4"	1-1/4"	250	1/2"	7/8"	500'	3000	42-3/4"	18-3/4"	17-5/8"	Add to Quote
1125-6-35	50	N	1"	1-7/16"	35	3/4"	1-1/4"	50'	3000	26"	18-1/2"	17-5/8"	Add to Quote
1125-6-50	55	N	1"	1-7/16"	50	3/4"	1-1/4"	75'	3000	32"	18-1/2"	17-5/8"	Add to Quote
1125-6-75	62	N	1"	1-7/16"	75	3/4"	1-1/4"	120'	3000	38-1/2"	18-1/2"	17-5/8"	Add to Quote
1125-6-100	69	N	1"	1-7/16"	100	3/4"	1-1/4"	150'	3000	44-1/2"	18-1/2"	17-5/8"	Add to Quote
1125-4-100-C	39	N	1/2"	7/8"	100	3/8"	3/4"	140'	3000	19-1/2"	18-3/4"	17-5/8"	Add to Quote
1125-4-200-C	42	N	1/2"	7/8"	200	3/8"	3/4"	300'	3000	25-1/2"	18-3/4"	17-5/8"	Add to Quote
1125-4-325-C	51	N	1/2"	7/8"	325	3/8"	3/4"	450'	3000	31-1/2"	18-3/4"	17-5/8"	Add to Quote
1125-4-450-C	55	N	1/2"	7/8"	450	3/8"	3/4"	625'	3000	37-1/2"	18-3/4"	17-5/8"	Add to Quote
1125-4-500-C	61	N	1/2"	7/8"	500	3/8"	3/4"	700'	3000	41-1/2"	18-3/4"	17-5/8"	Add to Quote
1125-5-50-C	41	N	3/4"	1-1/4"	50	1/2"	7/8"	100'	3000	20-3/4"	18-3/4"	17-5/8"	Add to Quote
1125-5-100-C	45	N	3/4"	1-1/4"	100	1/2"	7/8"	200'	3000	26-3/4"	18-3/4"	17-5/8"	Add to Quote
1125-5-175-C	53	N	3/4"	1-1/4"	175	1/2"	7/8"	325'	3000	32-3/4"	18-3/4"	17-5/8"	Add to Quote
1125-5-200-C	58	N	3/4"	1-1/4"	200	1/2"	7/8"	450'	3000	38-3/4"	18-3/4"	17-5/8"	Add to Quote
1125-5-250-C	62	N	3/4"	1-1/4"	250	1/2"	7/8"	500'	3000	42-3/4"	18-3/4"	17-5/8"	Add to Quote



USA Made, Quality & Support

We take great pride in designing, building and supplying the world's finest reels made right here in the U.S.A.



2 Year Warranty

Coxreels proudly stands behind our reels as they are built to last!

PRODUCTS

Spring Driven

EZ-Coil®

Hand Crank

Motor Driven

Spring Driven & EZ-Coil® Accessories

Hand Crank & Motor Driven Accessories

INDUSTRIES

NEW RELEASES

LITERATURE

KNOWLEDGE CENTER

ABOUT COXREELS

REQUEST A QUOTE

FIND A DISTRIBUTOR

CONTACT US

Toll Free [800-269-7335](tel:800-269-7335)

Fax [800-229-7335](tel:800-229-7335)

Email info@coxreels.com

5865 S. Ash Ave.
Tempe, AZ 85283

Copyright © 2015 Coxreels
[Privacy Policy](#) | [Terms & Conditions](#)